


OakPlas

MODULUS

SEWAGE TREATMENT SYSTEM

TAKING CARE OF EFFLUENT, EFFICIENTLY

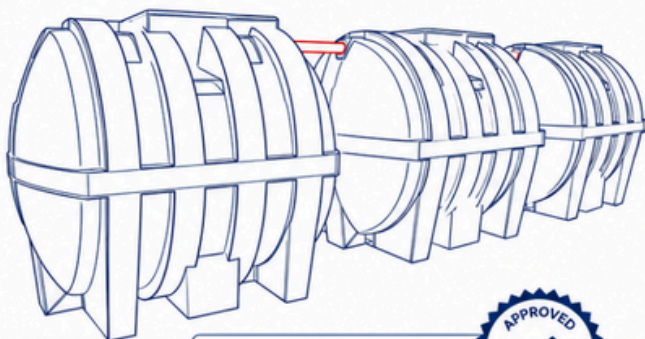

OM50 SHOWN

EN 12566:3


ACCREDITED
DESIGN



10 MODEL OPTIONS

6 - 50 PERSON SYSTEMS AVAILABLE

Designed & manufactured to be capable of taking care of effluent from single residences, multiple occupancy buildings & businesses.

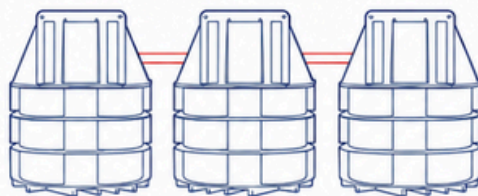

OM6 SHOWN

SPECIFICATIONS

Modulus Model	Population Equiv	Hydraulic Flow - litres per day	Dimensions: H x W x L (mm)	Inlet/Invert (mm)
OM6LP - low profile	6	1080	1060 x 1260 x 4180	350
OM6	6	1080	1535 x 1260 x 4180	500
OM9	9	1620	1535 x 1260 x 4180	500
OM12	12	2160	1920 x 1260 x 4180	500
OM20	20	3600	2135 x 1260 x 4180	500
OM25	25	4500	2130 x 1560 x 5080	500
OM30	30	5400	1920 x 1260 x 4680	500
OM40	40	7200	1940 x 2010 x 6210	500
OM50	50	9000	2100 x 2150 x 7000	500

MODULUS FEATURES

-  PRIME HDPE
-  ROTATIONAL MOULDED ONE-PIECE BODY
-  GRAVITY & PUMPED DISCHARGE OPTIONS
-  3-STAGE PROCESS DESIGN
-  FOOTPRINT CONFIGURATION OPTION
-  AERATED SAF/BAF FILTER TECHNOLOGY
-  BLOWER UNIT & HOUSING INCLUDED
-  PEDESTRIAN RATED INSPECTION COVERS
-  RECYCLABLE AFTER WORKING LIFE

DOMESTIC & COMMERCIAL APPLICATIONS



Contact Us:

T: 01675 432 199

E: sales@oaklandsenvironmental.com



Visit Our Website:

www.oaklandsenvironmental.com